

# LSRC60-11

11 Cubic Ft. Ultra-low Chest Freezer



## -60°C Temperature Chest Freezer

Used by universities, hospitals and research institutes for sample storage. This is also used by the aerospace and manufacturing industries.

Digital controller with potential free contact (which makes it possible to connect it to an external alarm)

Temperature Range (°C)

-30° to -60°

Exterior WxDxH (In)

51.4x25.8x34.1

Internal WxDxH (In)


43.3x17.7x25.6

Capacity(Cu.FT)

11

Weight (lbs)

176

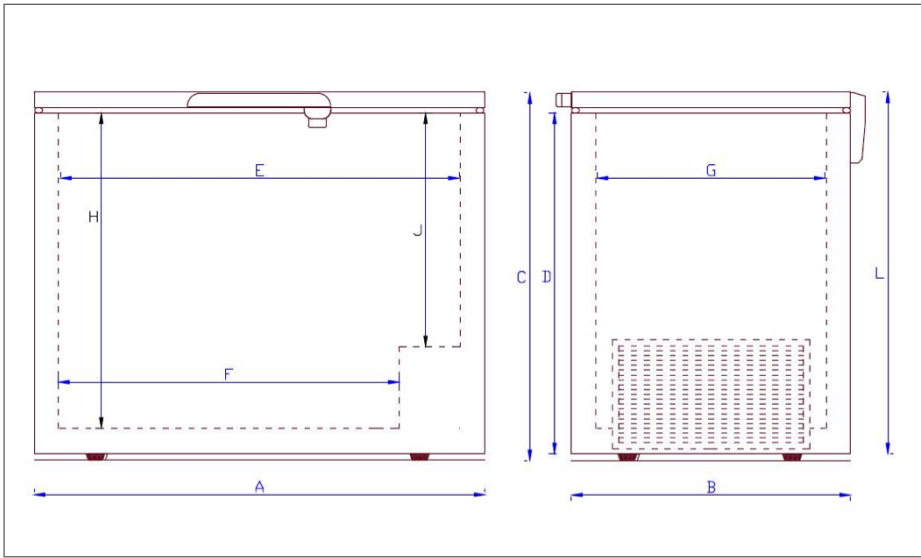

Dimension A	51.3"
Dimension B	25.7"
Dimension C	34"
Dimension D	30.7"
Dimension E	43.3"
Dimension F	35.4"
Dimension G	17.7"
Dimension H	24.4"
Dimension J	15.7"
Dimension L	33.5"
Insulation (mm)	100 mm



Inner lids (left hand side) which are mandatory for optimized function



ALARM BOX



## Model

Cabinet Type	Chest
Capacity (Cu.Ft)	11
Internal Size (WxDxH) inches	43.3x17.7x25.6
External Size (WxDxH) inches	51.4x25.8x34.1
NW/GW(Lbs)	176/194

## Performance

Temperature Range (C°)	-30°~ -60°
Ambient Temperature	10°-30°
Controller	Microprocessor
Display	Digital display

## Refrigeration

Compressor	Single
Cooling Method	Static
Defrost Mode	Manual
Refrigerant	Mixed HC
Insulation (mm)	100

## Construction

Inner Material	Steel
Inner Lids	5 Foam
Door Lock with Key	Yes
External Lock	Yes
Access Port	1pc. Ø 40 mm
Casters	4

## Alarm

Temperature	High/Low temperature, Sensor error, Door Ajar
-------------	---

## Electrical

Power Supply(V/HZ)	110/60
Rated Current(A)	4.3

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



**This unit comes with a standard 2 year warranty.**